

HT-DDW3000

Quick Setup Guide 簡易設定指南



* 3 2 9 2 3 2 6 0 1 * (1)

Sony Corporation © 2008 Printed in Malaysia

English

This Quick Setup Guide describes how to connect a DVD player or Blu-ray disc player, satellite tuner or set-top box, TV, speakers and subwoofers so that you can enjoy multi channel surround sound. Refer to the operating instructions supplied with the receiver for details.

The illustrations in the guide designate speakers as **A** through **G**.

- A** Front speaker (left)
- B** Front speaker (right)
- C** Center speaker
- D** Surround speaker (left)
- E** Surround speaker (right)
- F** Subwoofer
- G** Subwoofer

1: Installing the speakers

The illustration at right shows an example of five speakers and two subwoofers configuration. Refer to the operating instructions supplied with the receiver.

About speaker placement

The front speakers, center speaker and subwoofers are magnetically shielded to allow it to be installed near a TV set. However, as the surround speakers are not magnetically shielded, we recommend that you place them slightly further away from a TV set.

2: Connecting the speakers

The illustrations at right show how to connect the speakers. Before you connect the speakers, check the speaker label on the rear panel of the speakers for the speaker type.

For details, refer to step 2 of "Getting started" of the operating instructions supplied with this receiver.

About speaker cords

- Black striped wire is minus (-) in polarity and should be connected to the minus (-) speaker terminal.
- Use the long speaker cords to connect the surround speakers and the short speaker cords to connect the front and center speakers.

About speaker jacks

- Connect the ⊕ jack to the ⊕ jack of the receiver and connect the ⊖ jack to the ⊖ jack of the receiver.
- Refer to the illustration at right for details of connecting speaker cords.

中文

本簡易設定指南介紹如何連接 DVD 播放機或藍色光芒光碟播放機、衛星調諧器或機上盒、電視機、揚聲器和超低音揚聲器，以便享受多聲道環繞聲音。有關詳細內容，請參閱隨本接收機附帶的使用說明書。

本指南的圖示以字母 **A** 到 **G** 標示各揚聲器。

- A** 前置揚聲器 (左)
- B** 前置揚聲器 (右)
- C** 中置揚聲器
- D** 環繞揚聲器 (左)
- E** 環繞揚聲器 (右)
- F** 超低音揚聲器
- G** 超低音揚聲器

1: 安裝揚聲器

右邊圖示為五個揚聲器和兩個超低音揚聲器組態的範例。請參閱隨本接收機附帶的使用說明書。

關於揚聲器放置

前置揚聲器、中置揚聲器和超低音揚聲器均有磁屏蔽，可以安裝在電視機旁邊。但環繞揚聲器無磁屏蔽，我們建議您將這些揚聲器放在離電視機稍遠一點。

2: 連接揚聲器

右邊圖示為揚聲器的連接方式。連接揚聲器之前，請先確認揚聲器後面板揚聲器標籤上的揚聲器種類。詳細內容，請參閱隨本接收機附帶的使用說明書中的“準備工作”的步驟 2。


關於揚聲器線

- 黑色條紋線是負極 (-)，必須連接到揚聲器負極 (-) 端子。
- 較長的揚聲器線用於連接環繞揚聲器，較短的揚聲器線連接前置和中置揚聲器。

關於揚聲器插孔


- 將 ⊕ 插孔連接到接收機的 ⊕ 插孔，將 ⊖ 插孔連接到接收機的 ⊖ 插孔。
- 有關連接揚聲器線的詳細內容，請參閱右邊圖示。

1: Installing the speakers/1: 安裝揚聲器

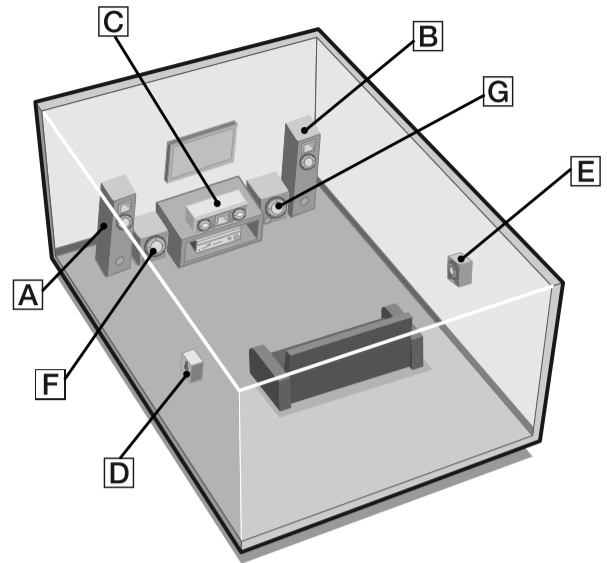


2: Connecting the speakers/2: 連接揚聲器


A B

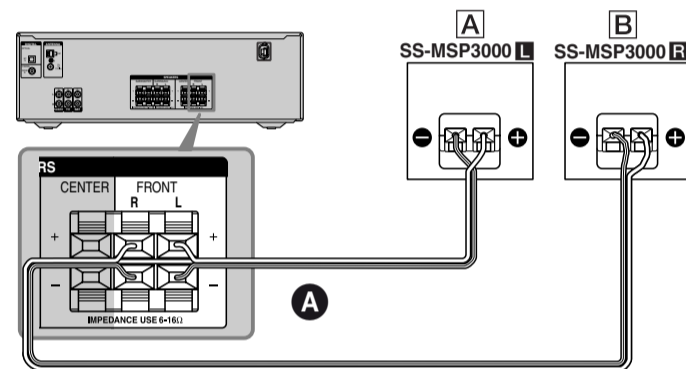


C

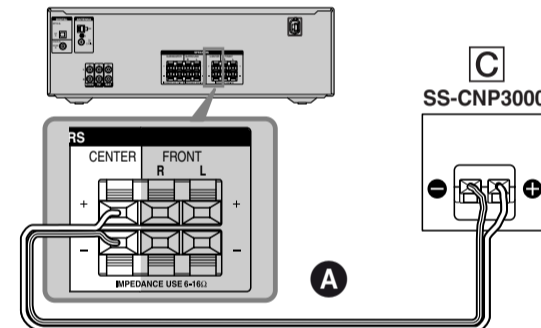


D E

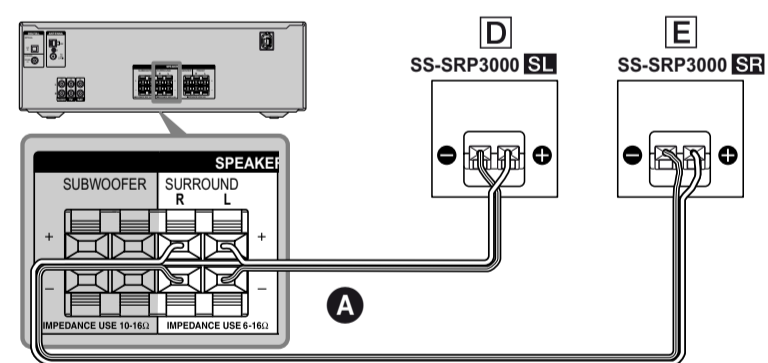

F G

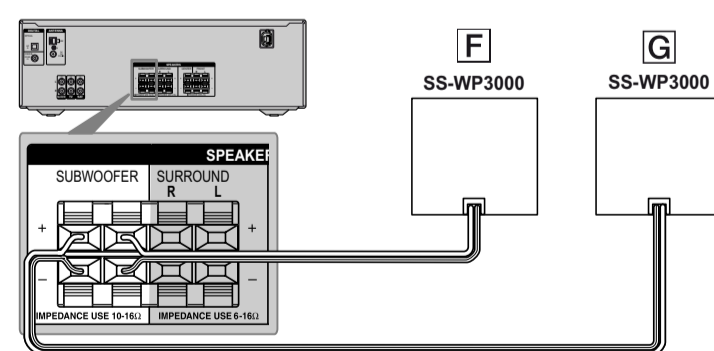

A Speaker cord (supplied)/揚聲器線 (附帶)

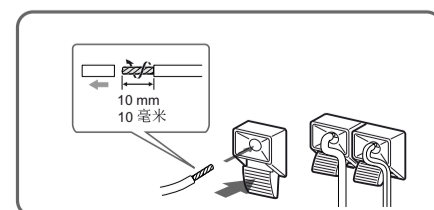

3: Connecting other components/

3: 連接其它組成機

Video components/ 視頻組成機


Satellite tuner or Set-top box/
衛星調諧器或機上盒

Notes

- Be sure to connect the video output of the DVD player/Blu-ray disc player and Satellite tuner/Set-top box to the TV, so that the image is displayed on the TV. Refer to the operating instructions of each connected component for details.
- To fully enjoy surround sound while watching TV programmes, connect the audio output of your TV jacks as shown and turn off the TV's volume or activate the TV's muting function.
- To enjoy multi channel surround sound from the DVD player or Blu-ray disc player, be sure to connect the coaxial digital cord.

註

- 務必將 DVD 播放機/藍色光碟播放機和衛星調諧器/機上盒的視頻輸出連接到電視機，以便在電視機上顯示影像。請參閱各連接組成機的使用說明書以獲取詳情。
- 若要在觀看電視節目時充分欣賞環繞聲，請如圖所示連接電視機插孔的音頻輸出，並關閉電視音量或啟動電視機的靜音功能。
- 若要欣賞來自 DVD 播放機或藍色光碟播放機的多聲道環繞聲，則必須連等同軸數位線。

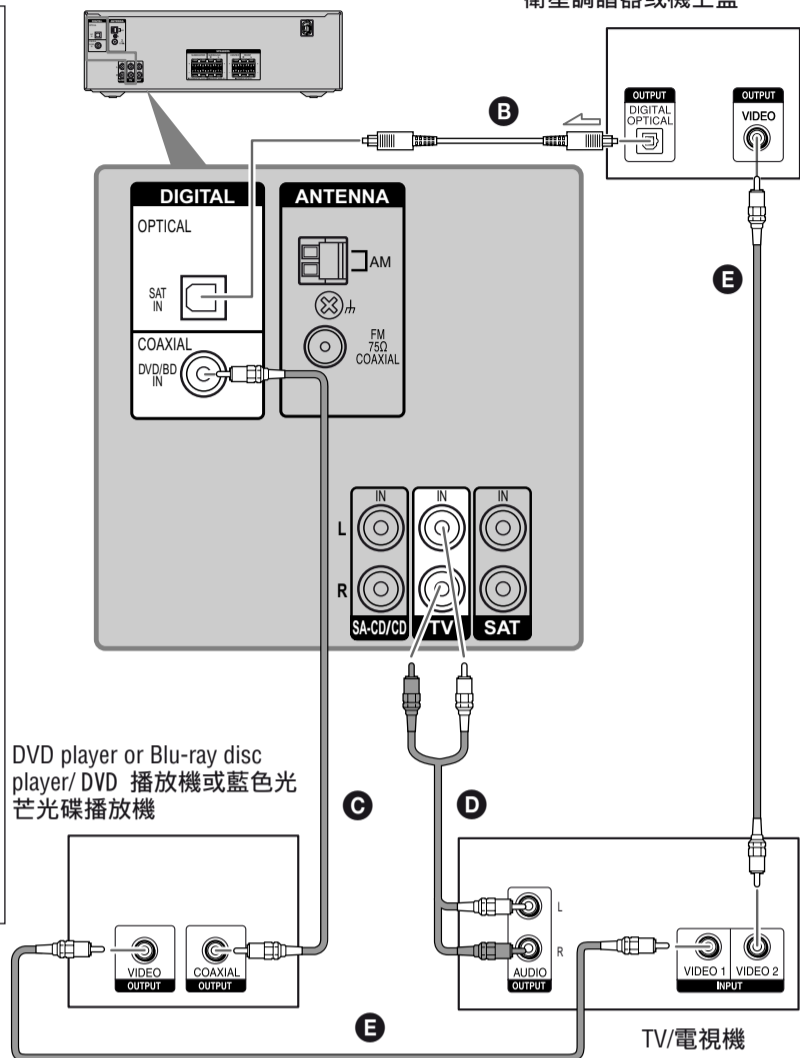

- B** Optical digital cord (not supplied)/光纖數位線 (無附帶)
- C** Coaxial digital cord (supplied)/同軸數位線 (附帶)
- D** Audio cord (not supplied)/音頻線 (無附帶)
- E** Video cord (not supplied)/視頻線 (無附帶)

3: Connecting other components

This is an example of how to connect this receiver and your components. Refer to step 3 of "Getting started" of the operating instructions supplied with this receiver for details on other connections and other components.

4: Connect all power cords last

Connect the AC power cord to a wall outlet. Refer to "Connecting the AC power cord" in the operating instructions supplied with the receiver.

5: Calibrating the speaker settings automatically

You can set up the speakers to obtain the sound you want from all connected speakers automatically by using the Auto Calibration function. The Auto Calibration function will:

- Check the connection between each speaker and the receiver.
- Adjust the speaker level.
- Measure the distance of each speaker from your listening position.

1 Connect the supplied optimizer microphone to the VIDEO IN/PORTABLE AUDIO IN/AUTO CAL MIC jack on the receiver.

2 Set up the optimizer microphone.

Place the optimizer microphone at your listening position. You can also use a stool or tripod so that the optimizer microphone remains at the same height as your ears.

3 Press AMP MENU, then press AUTO CAL.

The Auto Calibration function starts.

For details on the Auto Calibration function, refer to step 6 of "Getting started" of the operating instructions supplied with this receiver.

Notes

- If there are any obstacles in the path between the optimizer microphone and the speakers, the calibration cannot be performed correctly. Remove any obstacles from the measurement area to avoid measurement error.
- The Auto Calibration function cannot detect the subwoofer. Therefore, all subwoofer settings will be maintained.

6: Setting up other components



You should set up each component so that the sound is output from the speakers correctly when you playback a connected component. Refer to the operating instructions supplied with each component.

After the setting

The receiver is now ready to use. Refer to the operating instructions supplied with the receiver for details.

5: Calibrating the speaker settings automatically/

5: 自動校準揚聲器設定

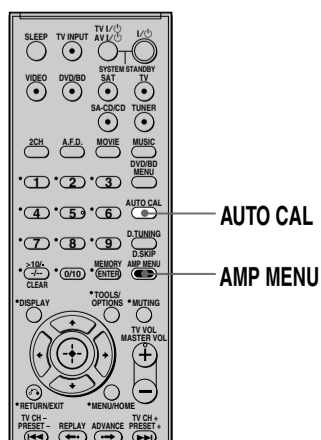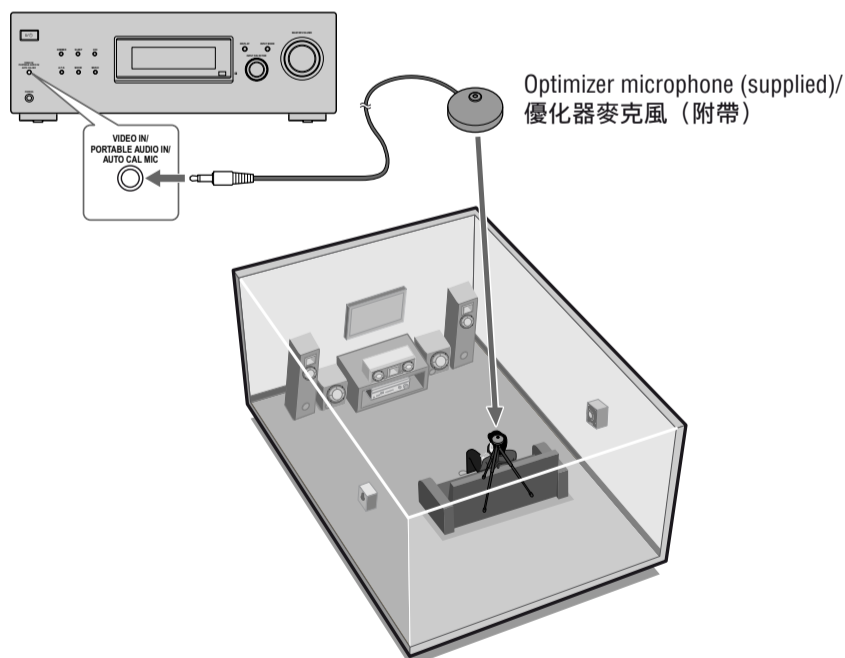

3: 連接其它組件

此部份介紹如何連接本接收機和其它組成機。有關其它連接方法和其它組成機的詳細內容，請參閱隨本接收機附帶的使用說明書中的“準備工作”的步驟 3。

4: 最後連接所有電源線

把 AC (交流) 電源線連接到牆上電源插座。請參閱隨本接收機附帶的使用說明書中的“連接交流電源線”。

5: 自動校準揚聲器設定

您可以使用自動校準功能設定揚聲器來自動從所有連接的揚聲器獲得您想要的聲音。自動校準功能會：

- 檢查每個揚聲器和接收機之間的連接。
- 調整揚聲器電平。
- 從您的聆聽位置測量與每個揚聲器的距離。

1 將附帶的優化器麥克風連接到接收機的 VIDEO IN/PORTABLE AUDIO IN/AUTO CAL MIC 插孔。

2 裝設優化器麥克風。

將優化器麥克風裝設在您的聆聽位置。您也可使用椅凳或三腳架，使優化器麥克風維持在與您耳朵等高的位置。

3 按下 AMP MENU，然後按下 AUTO CAL。

自動校準功能即開始。

有關自動校準功能的詳細內容，請參閱隨本接收機附帶的使用說明書中的“準備工作”的步驟 6。

註

- 如果優化器麥克風和揚聲器通道之間具有任何阻礙物，便無法準確進行校準。請移開測量區域內的任何阻礙物，以避免出現測量錯誤的情況。
- 自動校準功能無法檢測超低音揚聲器。因此，所有的超低音揚聲器設定將保持不變。

6: 設定其它組成機

應該對所連接的各個組成機進行設定，以便在播放某個連接組成機時能夠從揚聲器正確輸出聲音。請參閱隨各組成機附帶的使用說明書。

設定後

接收機已可以使用。有關詳細內容，請參閱隨本接收機附帶的使用說明書。